

TECHNICAL DATA SHEET



ISO 9001



Validation date: 07/05/2013

**!Attention product
homologated as a
project!**

CUSTOMIZED MANUFACTURING CONVEYOR BELT TPU WHITE 1PURB25MAT/FW

Complies with FDA and EU regulations for conveying of foodstuff

CONSTRUCTION

1	1-ply polyester fabric
PUR	TPU polyurethan
B	Colour : white
25	Top cover thickness : 0,25 mm
MAT	Mat finish
F	120N/mm fabric, flexible in weft
W	Impregnated backside

MAIN TECHNICAL DATA


Top cover:	hardness: 85 Sh.A	surface: mat, smooth
Total thickness:	0,90 mm	$\pm 0,1$ mm per ply
Weight per m²:	950 g	$\pm 10\%$
Friction Coefficient on steel slider bed:	0,20	$\pm 20\%$
Manufacturing width:	2 000 mm	
Temperatures:		
* Product temperature:	-40°C to +90°C	
* Ambient temperature:	-25°C to +60°C	
Type of support:	Slider bed	

MECHANICAL DATA

Tolerances: +20% -10%

Breaking load:	90 N/mm
Load for 1% extension:	7 N/mm
Maximum working tension:	10 N/mm

Pulley diameters:

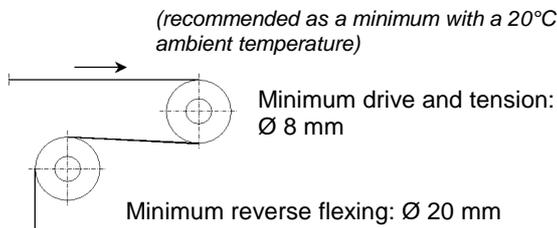

These values are not linked to the requested Ø to pull the belt to rotation.

Ambient temperature: from 0°C to +8°C: add +50%
from 0°C to -25°C: add +100%

ENDLESS JOINTINGS

Top heating plate:	150°C ± 10 °C
Bottom heating plate:	150°C ± 10 °C
Time:	1 mn ± 1 mn
Pressure:	2,0 bar $\pm 0,5$ bar
Additional material (powder or film):	none

These recommendations may vary according to the equipment used and press heating system.

Splicing methods to be used:

DS (finger joint)



Fasteners: SL00 - SECURI-G001

Accessories that may be fitted on this belt: None

*These data are subject to modification. Please make sure of their validity.
REVEYRON S.A. should not be held responsible when the data sheet used is not valid anymore.*

reveyron S.A.

247, route du Mas Rillier, Les Echets - 01700 MIRIBEL - France

Tél.: +33 (0)4 78 91 81 01

Fax: +33 (0)4 78 91 05 09

www.reveyron.com

E.mail: info@reveyron.fr