

# TECHNICAL DATA SHEET



Validation date: 19/05/2009

ISO 9001



## STANDARD RANGE 1PURB55/LCW

## CONVEYOR BELT TPU WHITE

Complies with FDA and EU regulations for conveying of foodstuff

### CONSTRUCTION

<b>1</b>	1-ply polyester fabric
<b>PUR</b>	TPU polyurethan
<b>B</b>	Colour : white
<b>55</b>	Top cover thickness : 0,55 mm
<b>LC</b>	115N/mm fabric, rigid in weft, antistatic
<b>W</b>	Impregnated backside

### MAIN TECHNICAL DATA


<b>Top cover:</b>	hardness: 85 Sh.A	surface: glossy, smooth
<b>Total thickness:</b>	1,15 mm $\pm$ 0,1 mm per ply	
<b>Weight per m<sup>2</sup>:</b>	1 250 g $\pm$ 10%	
<b>Friction Coefficient on steel slider bed:</b>	0,20 $\pm$ 20%	
<b>Manufacturing width:</b>	2 000 mm	
<b>Temperatures:</b>		
* Product temperature:	-40°C to +90°C	
* Ambient temperature:	-25°C to +60°C	
<b>Type of support:</b>	Slider bed	

### MECHANICAL DATA

Tolerances: +20% -10%

<b>Breaking load:</b>	90 N/mm
<b>Load for 1% extension:</b>	7 N/mm
<b>Maximum working tension:</b>	10 N/mm

### Pulley diameters:

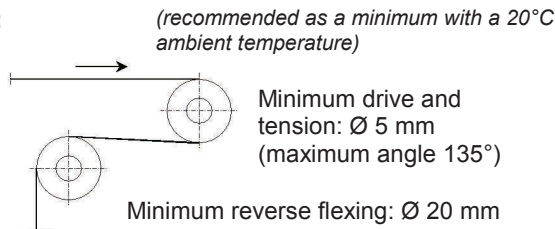

These values are not linked to the requested  $\varnothing$  to pull the belt to rotation.

Ambient temperature: from 0°C to +8°C: add +50%  
from 0°C to -25°C: add +100%

### ENDLESS JOINTINGS

Top heating plate:	150°C $\pm$ 10°C
Bottom heating plate:	130°C $\pm$ 10°C
Time:	1 mn $\pm$ 1 mn
Pressure:	1,0 bar $\pm$ 0,5 bar
Additional material (powder or film):	none

These recommendations may vary according to the equipment used and press heating system.

### Splicing methods to be used:

DS (finger joint)



**Fasteners:** SL00 - SecuriG1

**Accessories that may be fitted on this belt:** None

These data are subject to modification. Please make sure of their validity.  
REVEYRON S.A. should not be held responsible when the data sheet used is not valid anymore.

**reveyron S.A.**

247, route du Mas Rillier, Les Echets - 01700 MIRIBEL - France

Tél.: +33 (0)4 78 91 81 01

Fax: +33 (0)4 78 91 05 09

[www.reveyron.com](http://www.reveyron.com)

E.mail: [info@reveyron.fr](mailto:info@reveyron.fr)